

CPA2

Specified Performance*


Permeate Flow:	10,000 gpd (37.9 m ³ /d)
Salt Rejection:	99.7% (99.5% minimum)
Test Conditions:	1500 ppm NaCl solution
	225 psi (1.55 MPa) Applied Pressure
	77 °F (25 °C) Operating Temperature
	15% Permeate Recovery
	6.5 - 7.0 pH Range

*The Specified Performance is based on data taken after approximately 30 minutes of operation. Actual testing of elements may be done at conditions which vary from these exact values; in which case, the performance is normalized back to these standard conditions. Permeate flow for individual elements may vary +25 / -15 percent from the value specified.

General Product Description**

Configuration:	Spiral Wound
Membrane Polymer:	Composite Polyamide
Membrane Active Area**:	365 ft ² (33.9 m ²)
Feed Spacer:	34 mil (0.87 mm)

Packaging: All membrane elements are supplied with a brine seal, interconnector, and O-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box.

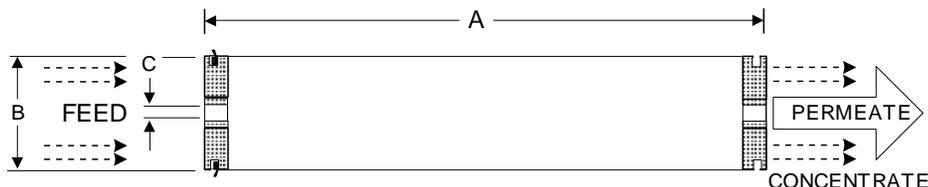

Element Details**

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	7.89 (200)	1.125 (28.6)	27.6 ± 2 (12.5 ± 1)

**Values listed are indicative, not specified. For more detailed specifications, see our Technical Service Bulletin documents or contact Hydranautics Technical Department. Element weight values are as shipped from factory. Elements that are used and then gravity drained may still contain at least an additional 2 lbs (1 kg) of liquid.

Product Use and Restrictions^

Maximum Applied Pressure:	600 psig (4.14 MPa)
Maximum Chlorine Concentration:	< 0.1 ppm
Maximum Operating Temperature:	113 °F (45 °C)
pH Range, Continuous (Cleaning):	2-10 (1-12)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI (15 mins):	5.0
Maximum Feed Flow:	75 gpm (17.0 m ³ /h)
Maximum Pressure Drop for Each Element:	15 psi (0.10 MPa)

^ The limitations shown here are for general use. For specified projects, operation at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more details.

Disclaimer: The information and data are presented in good faith and in lieu of all warranties. All express or implied warranties, including the warranties of merchantability and fitness for a particular purpose, are hereby disclaimed and excluded. Conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses. 2/21/2018

Membrane Element

CPA2-4040

Performance:	Permeate Flow:	2,250 gpd (8.5 m ³ /d)
	Salt Rejection :	99.5% (99.2% minimum)

Type	Configuration:	Spiral Wound
	Membrane Polymer:	Composite Polyamide
	Membrane Active Area:	85 ft ² (7.9 m ²)


Application Data*	Maximum Applied Pressure:	600 psig (4.14 MPa)
	Maximum Chlorine Concentration:	< 0.1 PPM
	Maximum Operating Temperature:	113 °F (45 °C)
	pH Range, Continuous (Cleaning):	2-10 (1-12)*
	Maximum Feedwater Turbidity:	1.0 NTU
	Maximum Feedwater SDI (15 mins):	5.0
	Maximum Feed Flow:	16 GPM (3.6 m ³ /h)
	Maximum Pressure Drop for Each Element:	15 psi

* The limitations shown here are for general use. For specific projects, operating at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more detail on operation limits, cleaning pH, and cleaning temperatures.

Test Conditions

The stated performance is initial (data taken after 30 minutes of operation), based on the following conditions:

1500 PPM NaCl solution
 225 psi (1.55 MPa) Applied Pressure
 77 °F (25 °C) Operating Temperature
 15% Permeate Recovery
 6.5 - 7.0 pH Range

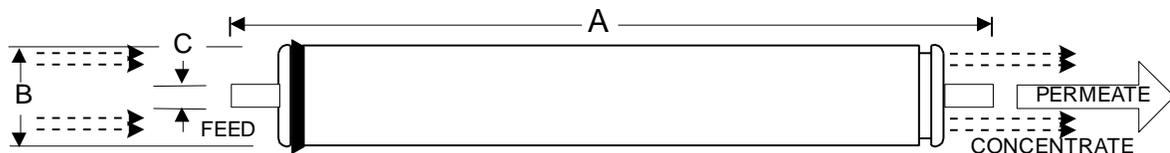

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.00 (1016)	3.95 (100.3)	0.75 (19.1)	8 (3.6)

Core tube extension = 1.05" (26.7 mm)

Notice: Permeate flow for individual elements may vary + 33 or - 15 percent. All membrane elements are supplied with a brine seal, interconnector, and o-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution and then packaged in a cardboard box.

Hydranautics believes the information and data contained herein to be accurate and useful. The information and data are offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses. 2/16/17

CPA3

Specified Performance*


Permeate Flow:	11,000 gpd (41.6 m ³ /d)
Salt Rejection:	99.7% (99.6% minimum)
Test Conditions:	1500 ppm NaCl solution
	225 psi (1.55 MPa) Applied Pressure
	77 °F (25 °C) Operating Temperature
	15% Permeate Recovery
	6.5 - 7.0 pH Range

*The Specified Performance is based on data taken after approximately 30 minutes of operation. Actual testing of elements may be done at conditions which vary from these exact values; in which case, the performance is normalized back to these standard conditions. Permeate flow for individual elements may vary ±15 percent from the value specified.

General Product Description**

Configuration:	Spiral Wound
Membrane Polymer:	Composite Polyamide
Membrane Active Area**:	400 ft ² (37.2 m ²)
Feed Spacer:	31 mil (0.787 mm)

Packaging: All membrane elements are supplied with a brine seal, interconnector, and O-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box.

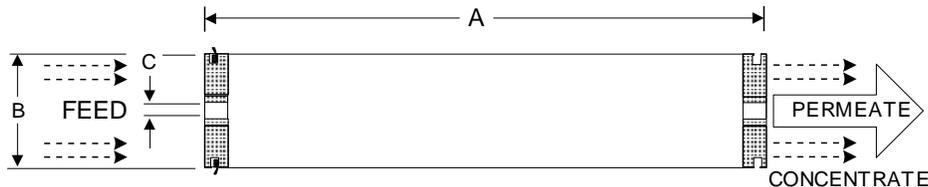

Element Details**

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	7.89 (200)	1.125 (28.6)	27.6 ± 2 (12.5 ± 1)

**Values listed are indicative, not specified. For more detailed specifications, see our Technical Service Bulletin documents or contact Hydranautics Technical Department. Element weight values are as shipped from factory. Elements that are used and then gravity drained may still contain at least an additional 2 lbs (1 kg) of liquid.

Product Use and Restrictions^

Maximum Applied Pressure:	600 psig (4.14 MPa)
Maximum Chlorine Concentration:	< 0.1 ppm
Maximum Operating Temperature:	113 °F (45 °C)
pH Range, Continuous (Cleaning):	2-10.8 (1-12.5)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI (15 mins):	5.0
Maximum Feed Flow:	75 gpm (17.0 m ³ /h)
Maximum Pressure Drop for Each Element:	15 psi (0.10 MPa)

^ The limitations shown here are for general use. For specified projects, operation at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more details.

Disclaimer: The information and data are presented in good faith and in lieu of all warranties. All express or implied warranties, including the warranties of merchantability and fitness for a particular purpose, are hereby disclaimed and excluded. Conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses. 2/21/2018

CPA5-LD

Specified Performance*


Permeate Flow:	11,000 gpd (41.6 m ³ /d)
Salt Rejection:	99.7% (99.6% minimum)
Test Conditions:	1500 ppm NaCl solution 225 psi (1.55 MPa) Applied Pressure 77 °F (25 °C) Operating Temperature 15% Permeate Recovery 6.5 - 7.0 pH Range

*The Specified Performance is based on data taken after approximately 30 minutes of operation. Actual testing of elements may be done at conditions which vary from these exact values; in which case, the performance is normalized back to these standard conditions. Permeate flow for individual elements may vary ±15 percent from the value specified.

General Product Description**

Configuration:	Low Fouling Spiral Wound
Membrane Polymer:	Composite Polyamide
Membrane Active Area**:	400 ft ² (37.2 m ²)
Feed Spacer:	34 mil (0.864 mm)

Packaging: All membrane elements are supplied with a brine seal, interconnector, and O-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box.

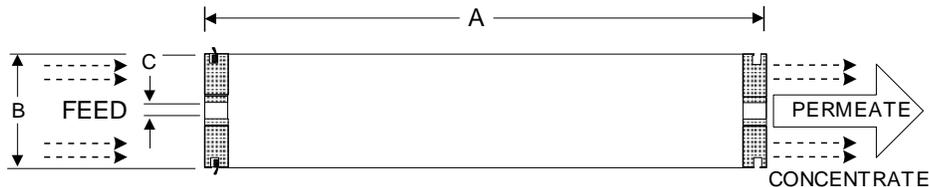

Element Details**

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	7.89 (200)	1.125 (28.6)	27.6 ± 2 (12.5 ± 1)

**Values listed are indicative, not specified. For more detailed specifications, see our Technical Service Bulletin documents or contact Hydranautics Technical Department. Element weight values are as shipped from factory. Elements that are used and then gravity drained may still contain at least an additional 2 lbs (1 kg) of liquid.

Product Use and Restrictions^

Maximum Applied Pressure:	600 psig (4.14 MPa)
Maximum Chlorine Concentration:	< 0.1 ppm
Maximum Operating Temperature:	113 °F (45 °C)
pH Range, Continuous (Cleaning):	2-11 (1-13)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI (15 mins):	5.0
Maximum Feed Flow:	85 gpm (19.3 m ³ /h)
Maximum Pressure Drop for Each Element:	15 psi (0.10 MPa)

^ The limitations shown here are for general use. For specified projects, operation at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more details.

Disclaimer: The information and data are presented in good faith and in lieu of all warranties. All express or implied warranties, including the warranties of merchantability and fitness for a particular purpose, are hereby disclaimed and excluded. Conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses. 2/21/2018

CPA5-LD-4040

Specified Performance*


Permeate Flow:	2,100 gpd (7.95 m ³ /d)
Salt Rejection:	99.7% (99.5% minimum)
Test Conditions:	1500 ppm NaCl solution
	225 psi (1.55 MPa) Applied Pressure
	77 °F (25 °C) Operating Temperature
	15% Permeate Recovery
	6.5 - 7.0 pH Range

*The Specified Performance is based on data taken after approximately 30 minutes of operation. Actual testing of elements may be done at conditions which vary from these exact values; in which case, the performance is normalized back to these standard conditions. Permeate flow for individual elements may vary +25 / -15 percent from the value specified.

General Product Description**

Configuration:	Low Fouling Spiral Wound
Membrane Polymer:	Composite Polyamide
Membrane Active Area**:	80 ft ² (7.43 m ²)
Feed Spacer:	34 mil (0.864 mm)

Packaging: All membrane elements are supplied with a brine seal, interconnector, and O-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box.

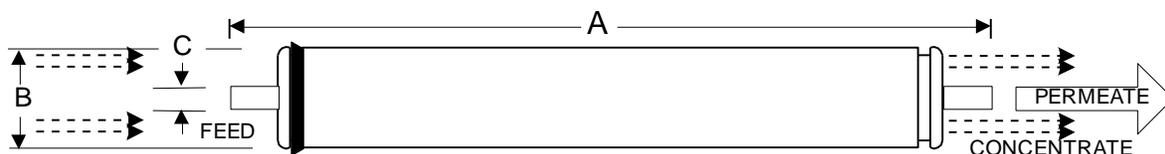

Element Details**

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	3.95 (100.3)	0.75 (19.1)	8 (3.6)

Core tube extension = 1.05" (26.7 mm)

**Values listed are indicative, not specified. For more detailed specifications, see our Technical Service Bulletin documents or contact Hydranautics Technical Department. Element weight values are as shipped from factory. Elements that are used and then gravity drained may still contain at least an additional 2 lbs. (1 kg) of liquid.

Product Use and Restrictions^

Maximum Applied Pressure:	600 psig (4.14 MPa)
Maximum Chlorine Concentration:	< 0.1 ppm
Maximum Operating Temperature:	113 °F (45 °C)
pH Range, Continuous (Cleaning):	2-11 (1-13)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI (15 mins):	5.0
Maximum Feed Flow:	16 gpm (3.6 m ³ /h)
Maximum Pressure Drop for Each Element:	15 psi (0.10 MPa)

^ The limitations shown here are for general use. For specified projects, operation at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more details.

Disclaimer: The information and data are presented in good faith and in lieu of all warranties. All express or implied warranties, including the warranties of merchantability and fitness for a particular purpose, are hereby disclaimed and excluded. Conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses. 2/21/2018

Hydranautics Corporate office

401 Jones Road, Oceanside, CA 92058, USA Toll Free: +1-800-CPA-PURE Tel: +1-760-901-2500 Fax: +1-760-901-2578
 Web: www.membranes.com Email: hy-info@nitto.com

CPA5 MAX

Specified Performance*


Permeate Flow:	12,000 gpd (45.4 m ³ /d)
Salt Rejection:	99.7% (99.6% minimum)
Test Conditions:	1500 ppm NaCl solution
	225 psi (1.55 MPa) Applied Pressure
	77 °F (25 °C) Operating Temperature
	15% Permeate Recovery
	6.5 - 7.0 pH Range

*The Specified Performance is based on data taken after approximately 30 minutes of operation. Actual testing of elements may be done at conditions which vary from these exact values; in which case, the performance is normalized back to these standard conditions. Permeate flow for individual elements may vary ±15 percent from the value specified.

General Product Description**

Configuration:	Spiral Wound
Membrane Polymer:	Composite Polyamide
Membrane Active Area**:	440 ft ² (40.9 m ²)

Packaging: All membrane elements are supplied with a brine seal, interconnector, and O-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box.

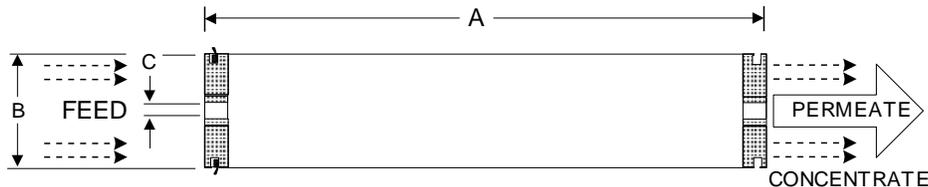

Element Details**

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	7.89 (200)	1.125 (28.6)	29.8 ± 2 (13.5 ± 1)

**Values listed are indicative, not specified. For more detailed specifications, see our Technical Service Bulletin documents or contact Hydranautics Technical Department. Element weight values are as shipped from factory. Elements that are used and then gravity drained may still contain at least an additional 2 lbs (1 kg) of liquid.

Product Use and Restrictions^

Maximum Applied Pressure:	600 psig (4.14 MPa)
Maximum Chlorine Concentration:	< 0.1 ppm
Maximum Operating Temperature:	113 °F (45 °C)
pH Range, Continuous (Cleaning):	2-11 (1-13)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI (15 mins):	5.0
Maximum Feed Flow:	75 gpm (17.0 m ³ /h)
Maximum Pressure Drop for Each Element:	15 psi (0.10 MPa)

^ The limitations shown here are for general use. For specified projects, operation at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more details.

Disclaimer: The information and data are presented in good faith and in lieu of all warranties. All express or implied warranties, including the warranties of merchantability and fitness for a particular purpose, are hereby disclaimed and excluded. Conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses. 2/21/2018

CPA6-LD

Specified Performance*


Permeate Flow:	8,000 gpd (30.3 m ³ /d)
Salt Rejection:	99.75% (99.6% minimum)
Test Conditions:	1500 ppm NaCl solution
	225 psi (1.55 MPa) Applied Pressure
	77 °F (25 °C) Operating Temperature
	15% Permeate Recovery
	6.5 - 7.0 pH Range

*The Specified Performance is based on data taken after approximately 30 minutes of operation. Actual testing of elements may be done at conditions which vary from these exact values; in which case, the performance is normalized back to these standard conditions. Permeate flow for individual elements may vary ±15 percent from the value specified.

General Product Description**

Configuration:	Low Fouling Spiral Wound
Membrane Polymer:	Composite Polyamide
Membrane Active Area**:	400 ft ² (37.2 m ²)
Feed Spacer:	34 mil (0.864 mm)

Packaging: All membrane elements are supplied with a brine seal, interconnector, and O-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box.

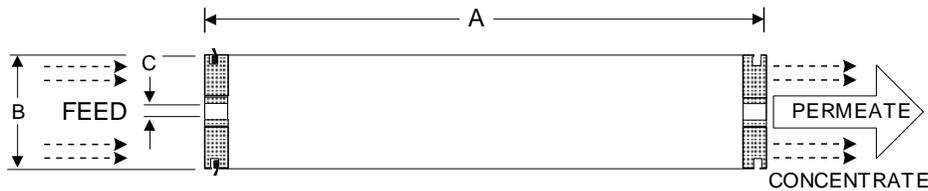

Element Details**

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	7.89 (200)	1.125 (28.6)	27.6 ± 2 (12.5 ± 1)

**Values listed are indicative, not specified. For more detailed specifications, see our Technical Service Bulletin documents or contact Hydranautics Technical Department. Element weight values are as shipped from factory. Elements that are used and then gravity drained may still contain at least an additional 2 lbs (1 kg) of liquid.

Product Use and Restrictions^

Maximum Applied Pressure:	600 psig (4.14 MPa)
Maximum Chlorine Concentration:	< 0.1 ppm
Maximum Operating Temperature:	113 °F (45 °C)
pH Range, Continuous (Cleaning):	2-11 (1-13)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI (15 mins):	5.0
Maximum Feed Flow:	85 gpm (19.3 m ³ /h)
Maximum Pressure Drop for Each Element:	15 psi (0.10 MPa)

^ The limitations shown here are for general use. For specified projects, operation at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more details.

Disclaimer: The information and data are presented in good faith and in lieu of all warranties. All express or implied warranties, including the warranties of merchantability and fitness for a particular purpose, are hereby disclaimed and excluded. Conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses. 2/21/2018

Hydranautics Corporate office

CPA6 MAX

Specified Performance*

Permeate Flow: 8,800 gpd (33.3 m³/d)
 Salt Rejection: 99.75% (99.6% minimum)


Test Conditions: 1500 ppm NaCl solution
 225 psi (1.55 MPa) Applied Pressure
 77 °F (25 °C) Operating Temperature
 15% Permeate Recovery
 6.5 - 7.0 pH Range

*The Specified Performance is based on data taken after approximately 30 minutes of operation. Actual testing of elements may be done at conditions which vary from these exact values; in which case, the performance is normalized back to these standard conditions. Permeate flow for individual elements may vary ±15 percent from the value specified.

General Product Description**

Configuration: Spiral Wound
 Membrane Polymer: Composite Polyamide
 Membrane Active Area**: 440 ft² (40.9 m²)

Packaging: All membrane elements are supplied with a brine seal, interconnector, and O-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box.

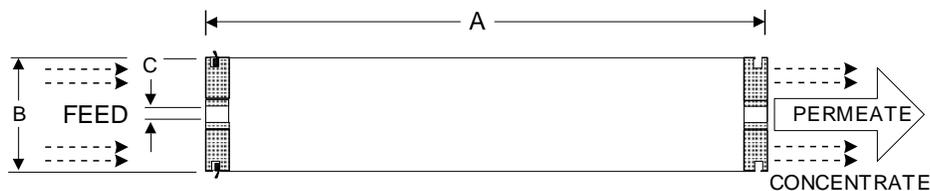

Element Details**

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	7.89 (200)	1.125 (28.6)	29.8 ± 2 (13.5 ± 1)

**Values listed are indicative, not specified. For more detailed specifications, see our Technical Service Bulletin documents or contact Hydranautics Technical Department. Element weight values are as shipped from factory. Elements that are used and then gravity drained may still contain at least an additional 2 lbs (1 kg) of liquid.

Product Use and Restrictions^

Maximum Applied Pressure: 600 psig (4.14 MPa)
 Maximum Chlorine Concentration: < 0.1 ppm
 Maximum Operating Temperature: 113 °F (45 °C)
 pH Range, Continuous (Cleaning): 2-11 (1-13)
 Maximum Feedwater Turbidity: 1.0 NTU
 Maximum Feedwater SDI (15 mins): 5.0
 Maximum Feed Flow: 75 gpm (17.0 m³/h)
 Maximum Pressure Drop for Each Element: 15 psi (0.10 MPa)

^ The limitations shown here are for general use. For specified projects, operation at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more details.

Disclaimer: The information and data are presented in good faith and in lieu of all warranties. All express or implied warranties, including the warranties of merchantability and fitness for a particular purpose, are hereby disclaimed and excluded. Conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses. 2/21/2018

CPA7-LD

Specified Performance*


Permeate Flow:	11,500 gpd (43.5 m ³ /d)
Salt Rejection:	99.8% (99.7% minimum)
Test Conditions:	1500 ppm NaCl solution 225 psi (1.55 MPa) Applied Pressure 77 °F (25 °C) Operating Temperature 15% Permeate Recovery 6.5 - 7.0 pH Range

*The Specified Performance is based on data taken after approximately 30 minutes of operation. Actual testing of elements may be done at conditions which vary from these exact values; in which case, the performance is normalized back to these standard conditions. Permeate flow for individual elements may vary ±15 percent from the value specified.

General Product Description**

Configuration:	Low Fouling Spiral Wound
Membrane Polymer:	Composite Polyamide
Membrane Active Area**:	400 ft ² (37.2 m ²)
Feed Spacer:	34 mil (0.864 mm)

Packaging: All membrane elements are supplied with a brine seal, interconnector, and O-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box.

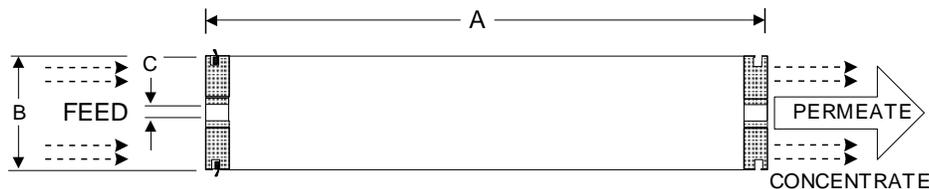

Element Details**

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	7.89 (200)	1.125 (28.6)	27.6 ± 2 (12.5 ± 1)

**Values listed are indicative, not specified. For more detailed specifications, see our Technical Service Bulletin documents or contact Hydranautics Technical Department. Element weight values are as shipped from factory. Elements that are used and then gravity drained may still contain at least an additional 2 lbs (1 kg) of liquid.

Product Use and Restrictions^

Maximum Applied Pressure:	600 psig (4.14 MPa)
Maximum Chlorine Concentration:	< 0.1 ppm
Maximum Operating Temperature:	113 °F (45 °C)
pH Range, Continuous (Cleaning):	2-11 (1-13)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI (15 mins):	5.0
Maximum Feed Flow:	85 gpm (19.3 m ³ /h)
Maximum Pressure Drop for Each Element:	15 psi (0.10 MPa)

^ The limitations shown here are for general use. For specified projects, operation at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more details.

Disclaimer: The information and data are presented in good faith and in lieu of all warranties. All express or implied warranties, including the warranties of merchantability and fitness for a particular purpose, are hereby disclaimed and excluded. Conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses. 2/21/2018

CPA7-LD-4040

Specified Performance*


Permeate Flow:	2,300 gpd (8.71 m ³ /d)
Salt Rejection:	99.8% (99.6% minimum)
Test Conditions:	1500 ppm NaCl solution
	225 psi (1.55 MPa) Applied Pressure
	77 °F (25 °C) Operating Temperature
	15% Permeate Recovery
	6.5 - 7.0 pH Range

*The Specified Performance is based on data taken after approximately 30 minutes of operation. Actual testing of elements may be done at conditions which vary from these exact values; in which case, the performance is normalized back to these standard conditions. Permeate flow for individual elements may vary + 25 or - 15 percent from the value specified.

General Product Description**

Configuration:	Low Fouling Spiral Wound
Membrane Polymer:	Composite Polyamide
Membrane Active Area**:	80 ft ² (7.43 m ²)
Feed Spacer:	34 mil (0.864 mm)

Packaging: All membrane elements are supplied with a brine seal, interconnector, and O-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box.

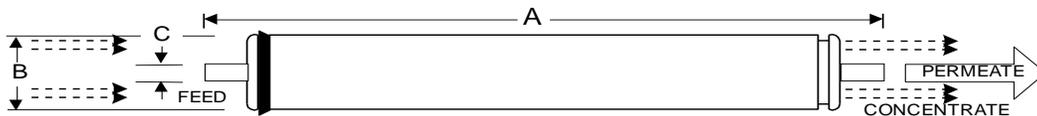

Element Details**

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	3.95 (100.3)	0.75 (19.1)	8 (3.6)

Core tube extension = 1.05" (26.7 mm)

**Values listed are indicative, not specified. For more detailed specifications, see our Technical Service Bulletin documents or contact Hydranautics Technical Department. Element weight values are as shipped from factory. Elements that are used and then gravity drained may still contain at least an additional 2 lbs. (1 kg) of liquid.

Product Use and Restrictions^

Maximum Applied Pressure:	600 psig (4.14 MPa)
Maximum Chlorine Concentration:	< 0.1 ppm
Maximum Operating Temperature:	113 °F (45 °C)
pH Range, Continuous (Cleaning):	2-11 (1-13)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI (15 mins):	5.0
Maximum Feed Flow:	16 gpm (3.6 m ³ /h)
Maximum Pressure Drop for Each Element:	15 psi (0.10 Mpa)

^ The limitations shown here are for general use. For specified projects, operation at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more details.

Disclaimer: The information and data are presented in good faith and in lieu of all warranties. All express or implied warranties, including the warranties of merchantability and fitness for a particular purpose, are hereby disclaimed and excluded. Conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses.

7/24/2018

CPA7 MAX

Specified Performance*


Permeate Flow:	12,600 gpd (47.7 m ³ /d)
Salt Rejection:	99.8% (99.7% minimum)
Test Conditions:	1500 ppm NaCl solution
	225 psi (1.55 MPa) Applied Pressure
	77 °F (25 °C) Operating Temperature
	15% Permeate Recovery
	6.5 - 7.0 pH Range

*The Specified Performance is based on data taken after approximately 30 minutes of operation. Actual testing of elements may be done at conditions which vary from these exact values; in which case, the performance is normalized back to these standard conditions. Permeate flow for individual elements may vary ±15 percent from the value specified.

General Product Description**

Configuration:	Spiral Wound
Membrane Polymer:	Composite Polyamide
Membrane Active Area**:	440 ft ² (40.9 m ²)

Packaging: All membrane elements are supplied with a brine seal, interconnector, and O-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box.

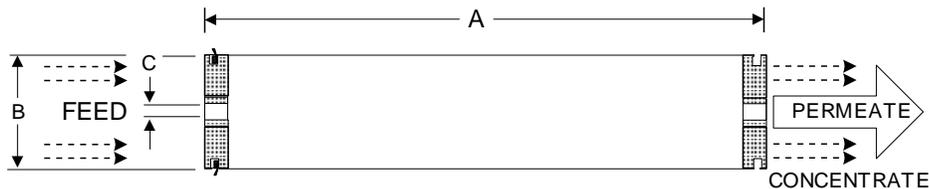

Element Details**

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	7.89 (200)	1.125 (28.6)	29.8 ± 2 (13.5 ± 1)

**Values listed are indicative, not specified. For more detailed specifications, see our Technical Service Bulletin documents or contact Hydranautics Technical Department. Element weight values are as shipped from factory. Elements that are used and then gravity drained may still contain at least an additional 2 lbs (1 kg) of liquid.

Product Use and Restrictions^

Maximum Applied Pressure:	600 psig (4.14 MPa)
Maximum Chlorine Concentration:	< 0.1 ppm
Maximum Operating Temperature:	113 °F (45 °C)
pH Range, Continuous (Cleaning):	2-11 (1-13)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI (15 mins):	5.0
Maximum Feed Flow:	75 gpm (17.0 m ³ /h)
Maximum Pressure Drop for Each Element:	15 psi (0.10 MPa)

^ The limitations shown here are for general use. For specified projects, operation at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more details.

Disclaimer: The information and data are presented in good faith and in lieu of all warranties. All express or implied warranties, including the warranties of merchantability and fitness for a particular purpose, are hereby disclaimed and excluded. Conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses. 2/9/2018